



**High temperature sensor
for combustible gases**

Sensepoint High Temperature Sensor



Excellent Performance

- Certified for hazardous area operation up to +150°C (+302°F)
- Alarm trip points as low as 5% LEL
- Fast speed of response
- Poison resistant detectors
- Low power consumption

Cost Effective

- Low cost disposable sensor
- Greater than 5 year typical operating life

Reliable Operation

- Thermally matched beads provide optimum accuracy and stability
- Proven technology from the World leader in combustible gas detection

Flexibility

- Measuring ranges from 0-20% LEL to 0-100% LEL
- Wide range of accessories

Robust Construction

- 316 Stainless Steel sensor body
- ATEX/ IECEx approved design

The Sensepoint High Temperature Sensor has been specifically designed for the detection of combustible gases in high temperature hazardous area locations. Typical applications include turbine enclosures and drying ovens used in solvent based printing and coating machines.

These applications require a sensor that provides reliable and stable detection allowing low level alarm settings across a wide temperature range. Utilising a specially matched pair of Honeywell poison resistant combustible gas detection elements, the Sensepoint High Temperature Sensor has a very stable baseline allowing alarm trip points to be set as low as 5% LEL across a temperature range of -55°C to +150°C (-67°F to +302°F). The gas measuring range can be configured from 0-20% LEL up to 0-100% LEL depending on the type of controller used.

The detector elements are housed in an explosion proof assembly, and provide an industry standard 3 wire mV bridge output which can be connected to a suitable control device or converted to an analog output signal via a field transmitter.




General Specification



General Specification ¹	
Range	0-20% LEL, 0-100% LEL (Control card dependent)
Speed of Response²	T60 Less than 6 seconds T90 Less than 10 seconds
Minimum Alarm Level³	5% LEL
Output Signal	mV bridge
Operating Temperature	-55°C to +150°C (-67°F to +302°F)
Operating Humidity	Continuous: 20 to 90% RH Intermittent: 10 to 99% RH
Operating Pressure	75 to 110kPa (750 to 1100mbar)
Stability (zero)	With time: Less than ±5% LEL / year With temperature: Less than ±3% LEL With humidity: Less than ±3% LEL With pressure: Less than ±3% LEL
Stability (span)	With time: Less than ±5% LEL / year With temperature: Less than ±4% LEL With humidity: Less than ±3% LEL With pressure: Less than ±3% LEL
Linearity	Better than ±5% fsd
Repeatability	Better than ±2% LEL
Warm-up Time	30 minutes
Detector Operating Life⁴	More than 5 years (typical)
Storage Life	Typically, no degradation has been observed in clean, stable conditions for up to 5 years
Power Consumption	0.7W at 200mA
Enclosure Material	316 Stainless Steel
Mounting Thread	M20, M25 or ¾" NPT
Weight	225g (7.9oz)
Certification	 II 2 GD Ex d IIC T3 Gb T _{amb} -55°C to +150°C  tb IIC T200°C Db IP66 A21 Baseefa08ATEX0264X IECEx BAS08.0069X

Notes:

1. Typical performance figures for a sensor calibrated on 10% LEL methane and tested at 20°C and 50% RH.
2. T60 / T90 defined as the time to achieve 60% and 90% of the signal obtained after 5 minutes exposure to 50% FSD gas concentration.
3. With recommended 3 month calibration period.
4. In clean atmosphere.

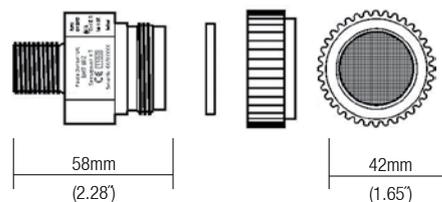

Our Product Range



Fixed Gas Monitoring

Honeywell Analytics offers a wide range of fixed gas detection solutions for a diverse array of industries and applications including: Commercial properties, industrial applications, semiconductor manufacturers, energy plants and petrochemical sites.

- » Detection of flammable, oxygen and toxic gases (including exotics)
- » Innovative use of 4 core sensing technologies – paper tape, electrochemical cell, catalytic bead and infrared
- » Capability to detect down to Parts Per Billion (ppb) or Percent by Volume (%v/v)
- » Cost effective regulatory compliance solutions

Portable Gas Monitoring

When it comes to personal protection from gas hazards, Honeywell Analytics has a wide range of reliable solutions ideally suited for use in confined or enclosed spaces.

These include:

- » Detection of flammable, oxygen and toxic gases
- » Single gas personal monitors – worn by the individual
- » Multi-gas portable gas monitors – used for confined space entry and regulatory compliance
- » Multi-gas transportable monitors – used for temporary protection of area during site construction and maintenance activities

Technical Services

At Honeywell Analytics, we believe in the value of great service and customer care. Our key commitment is providing complete and total customer satisfaction. Here are just a few of the services we can offer:

- » Full technical support
- » Expert team on hand to answer questions and queries
- » Fully equipped workshops to ensure quick turnaround on repairs
- » Comprehensive service engineer network
- » Training on product use and maintenance
- » Mobile calibration service
- » Customised programmes of preventative/corrective maintenance
- » Extended warranties on products

Find out more

www.honeywellanalytics.com

Contact Honeywell Analytics:

Europe, Middle East, Africa, India

Life Safety Distribution AG
Weiherallee 11a
CH-8610 Uster
Switzerland
Tel: +41 (0)44 943 4300
Fax: +41 (0)44 943 4398
gasdetection@honeywell.com

Technical Services

EMEA: HAexpert@honeywell.com
US: ha.us.service@honeywell.com
AP: ha.ap.service@honeywell.com

www.honeywell.com

Americas

Honeywell Analytics Inc.
405 Barclay Blvd.
Lincolnshire, IL 60069
USA
Tel: +1 847 955 8200
Toll free: +1 800 538 0363
Fax: +1 847 955 8210
detectgas@honeywell.com

Asia Pacific

Honeywell Analytics Asia Pacific
#508, Kolon Science Valley (I)
187-10 Guro-Dong, Guro-Gu
Seoul, 152-050
Korea
Tel: +82 (0)2 2025 0300
Fax: +82 (0)2 2025 0329
analytics.ap@honeywell.com

Please Note:

While every effort has been made to ensure accuracy in this publication, no responsibility can be accepted for errors or omissions. Data may change, as well as legislation, and you are strongly advised to obtain copies of the most recently issued regulations, standards, and guidelines. This publication is not intended to form the basis of a contract.

H_Sensepoint High Temp Sensor_DS0303_V5_EMEA
05/10

© 2010 Honeywell Analytics

Honeywell